



Panel Spec

Voc 27V
 Optimum Operating 22.6V
 Optimum Operating Current 8.85A
 Short Circuit Current 9.66A

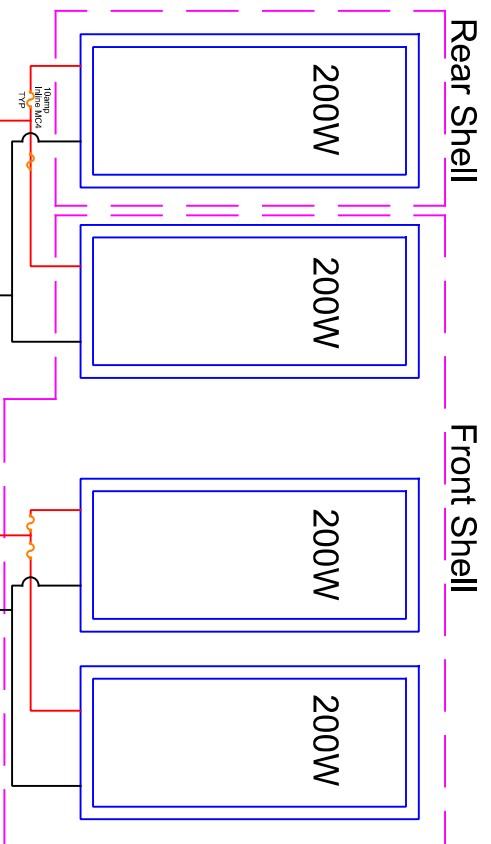

Bat Comp

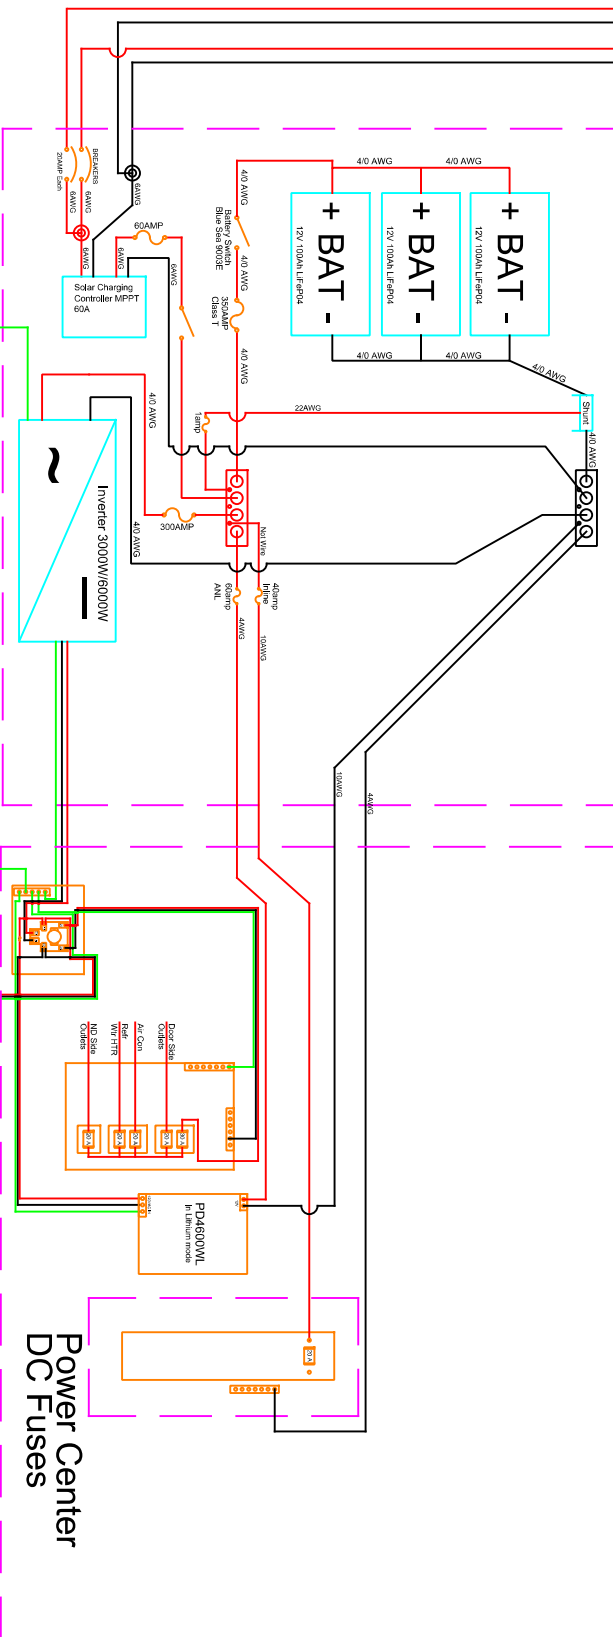

Distribution Area

Power Center DC Fuses

Battery Spec

Max Continuous Discharge 100A
 Standard/Max Charging 20A/100A
 Recommended charging Voltage 14.6V
 Pulse discharge C3
 300A output for 5 seconds
 200A output for 2 minutes